

Type: kab-la60-2x6qmm-5w5-oe-1.3m-298


1st end: Sub-D5W5, plug male type
max. 40A per Pin

2nd end: v0: open ends (standard)
v1: M5-cathode / end 7cm blue
M4-anode / end 9cm red
cable lugs, ring tongue

cable: 2x 6mm² coax.
I_{max}: 60A
Length: 1.3m



Laser Connector Cable

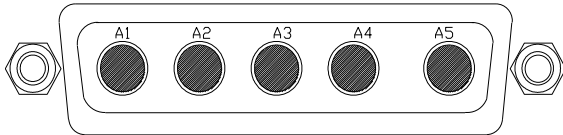

Sub-5W5, male Type

PIN.No	Abbr.	Function referring to OsTech driver layout
A3;A4	LDA+	Laser Diode Anode (+), core
A1;A2	LDC-	Laser Diode Cathode (-), screen
A5	n.c.	