OSTECH
ELECTRO OPTICAL INSTRUMENTS

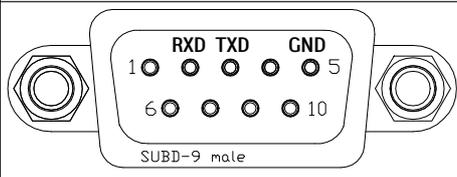# OsTech   Isolated USB to RS232 Data Converter

name: acc-conv-usb-rs232-1m5-iso-417

2-Wire optical isolated USB to RS232 converter with FTDI-chip.
Only RX and TX is supported. Handshake with RTS, CTS is not possible!
– Green LED indicates traffic from USB to RS232
– Red LED indicated traffic from RS232 to USB
– 1st end: Sub-D 9, plug male type
– 2nd end: USB plug type A
– cable length: 1.5m (request other lengths f.e. 0.5m, 3m, 5m)
– Typical supply current 15mA supported by 5V from USB port

drivers download here: http://www.ftdichip.com/Drivers/VCP.htm

© OsTech

RS232 Connector

RXD TXD   GND

1 · · · · 5

6 · · · 10

SUBD-9 male

PIN.No	Abbr.
2	RXD
3	TXD
5	GND