


Type: ds01-la12v06-pa08v14-pa04v14-o44-v0-748



- Laser max.: 12A, 6V
- TEC 1 max.: 8A, 14V
- TEC 2 max.: 4A, 14V
- trise-fall < 25us (optional < 5us)
- Supply Voltage: 24VDC
- External, Analog and Digital Modulation
- Internal Pulse Generator
- Pulses and Bursts internally and externally triggered
- Bias Current option
- Pilot Laser Supply
- External Fan Support


Laser & Peltier Connector

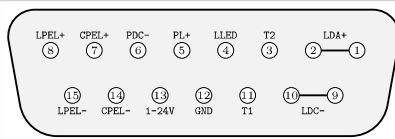

SubD-15 female


PIN.No	Abbr.	Function
1:2	LDA+	Laser Diode Anode
3	T2	Temperature Sensor 2 Input (default NTC-10kOhm@25°C)
4	LEDA+	Laser Active LED - Anode (+) ILED ca.5mA, Cathode at GND
5	PL+	Pilot Laser (+) (PL- at Pin GND)
6	PDC-	Photo Diode Cathode (-) (PDA+ Anode at GND)
7	CPEL+	„C“ Peltier element (+) max. 6A continuous current
8	LPEL+	„L“ Peltier element (+)
9:10	LDC-	Laser Diode Kathode
11	T1	Temperature Sensor 1 Input (default NTC-10kOhm@25°C)
12	GND	Common Ground - n.c. to Screen
13	1-24V	1 bis 24V Supply, max. 500mA vs. GND, supports fan etc.
14	CPEL-	„C“ Peltier element (-)
15	LPEL-	„L“ Peltier element (-)

Power and Support Connector for o44 devices



SubD-9 male

PIN.No	Abbr.	Function
4:5	SUP+	Power Supply typ. +24V DC
8:9	SUP0	Power Supply typ. 0V DC
3	ILOCK+	ca. 5mA over 2V
2	ILOCK-	Laser runs only on closed Interlock
6	MOD+	Digital and Analog Modulation Input; positiv Pin
1	MOD-	Digital and Analog Modulation Input; negativ Pin

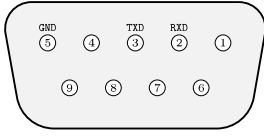RS232 Connector		PIN.No	Abbr.
 <p>SubD-9 female</p>	Standard RS232-Connector (No Null-Modem Cable !) 9600-Baud-8N1	2	RXD
		3	TXD
		5	GND

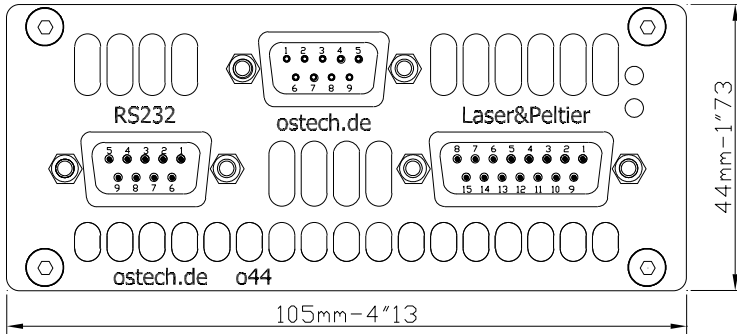


fig: ds01-Rear depth 160mm-6.3

Revision overview:
2017.10.10: "v0" - derived
References:
http://www.ostech.de/en/products/laser-drivers/ds01-o44 http://www.ostech.de/en/downloads/manuals/ds-en.pdf http://www.ostech.de/en/downloads/labview

Accessories
<ul style="list-style-type: none"> - kab-lpa08-16pol-subd15m-oe-1.5m-39 cable 16x0.35qmm SUBD15-Gold-6,5A/Pin to open end length 1m5 - acc-converter-usb-to-rs232-1m5-iso-417 RS232 to USB converter optical isolated with FTDI-Chip cable 1.5m - nt-280w-24vdc-t-1m0-ds01o44-587 power-supply vout-24V-13A-280W for-OsTech-OEM subd9-plug-for-ds01-o44-devices, vin-90~230AC"