


# Tabletop Laser & Peltier Controller

Type: ls11-la3.8v56-t8545-v1-950



- Laser max. : 3.8A – 56V
- t-rise-fall <10µs (optional <2µs)
- Supply Voltage: 100~230VAC – 50/60Hz
- External, Analog and Digital Modulation
- Internal Pulse Generator
- Continuouse Pulses, Single Pulse, Pulse Bursts,
- Internal or External Triggered
- Bias Current option
- Pilot Laser Support
- External Supply max. 1..22V – 800mA for Fan etc.
- Photo Diode Current Monitor max. 4mA
- optional additional TEC stage
- size 86x109x235mm (HxWxL)


## Laser & Peltier Connector

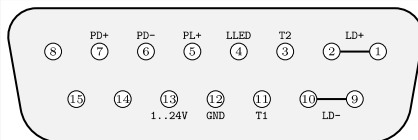

SubD15-female

PIN.No	Abbr.	Function
1;2	LD+	Laser Diode Anode (+)
3	T2	Temperature Sensor 2 Input, default NTC10kΩ, v.s. GND
4	LLED	Laser Active LED – Anode (+), 5V over 470R, v.s. GND
5	PL+	Pilot Laser (+), v.s. GND
6	PD-	Photo Diode Cathode (-)
7	PD+	Photo Diode Anode (+)
9;10	LD-	Laser Diode Cathode (-)
11	T1	Temperature Sensor 1 Input, default NTC10kΩ, v.s. GND
12	GND	Common Ground
13	1..24V	1 to 24V Supply, max. 800mA, vs. GND, supports fan etc.

RS232 Connector	AMOD/DMOD-IN Connector	MOD-OUT Connector	Interlock Connector
SubD-9 female Standard RS232-Connector 9600-Baud-8N1 (No Null-Modem Cable !)	BNC-Socket Input-Impdanz 10kOhm Digital Modulation with TTL-Pegel Analog Mod. 0-4[V] => 0-Imax[A]	BNC-Socket, current monitor 0-Imax[A] -> 0-4[V] Take care for laser isolation if you connect GND potential to an oscilloscope f.e.	Jack Connector 3.5mm Laser runs only if closed (ca. 5mA over 2V -> R <= 400R)

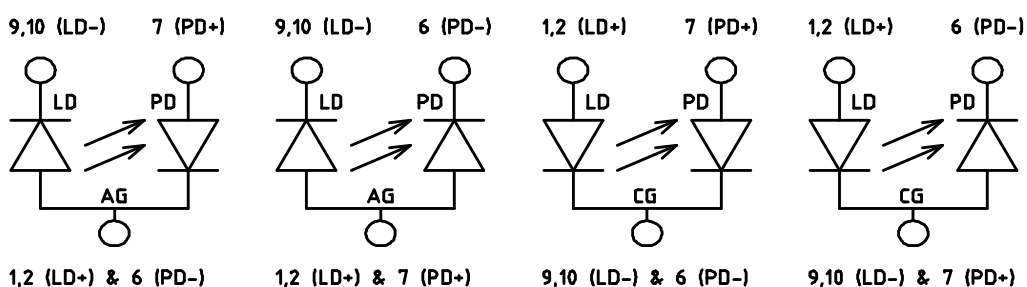

## Tabletop Laser & Peltier Controller

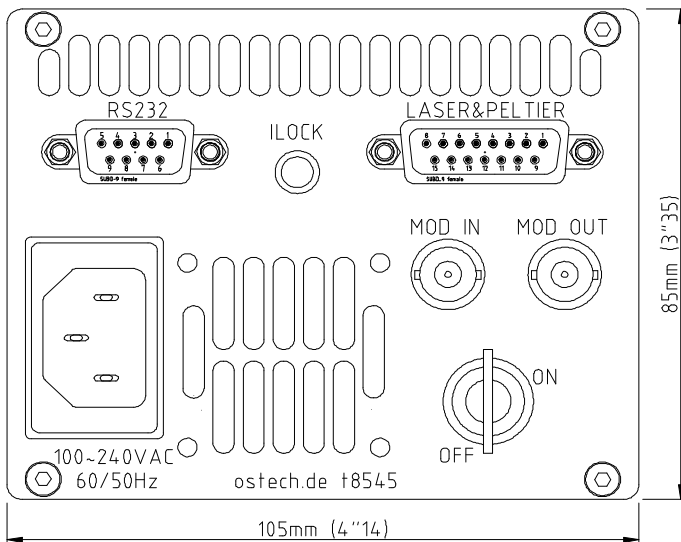


fig: ds11-t8611-rear; length 208mm (8")

### Revision overview:

- 2021-01-01: "v0" - new derivation from type 829
- 2021-01-01: "v1" - housing changed to 8544

### References:

- <http://www.ostech.de/en/products/laser-drivers/ds11-t85>
- <http://www.ostech.de/en/downloads/manuals/ds-en.pdf>
- <http://www.ostech.de/en/downloads/labview>

### Accessories

- kab-lpa08-16pol-subd15m-oe-1.5m-39  
cable 16x0.35qmm SUBD15-Gold-6,5A/Pin to open end length 1m5
- acc-converter-usb-to-rs232-1m5-iso-417  
RS232 to USB converter optical isolated with FTDI-Chip cable 1.5m
- hsp-06-btf-v0-631  
butterfly-mount for-btf14-housing, including-passive-cooler-block with integrated-fan, layout-0 Qmax-6W rth-2,2°C/W